


# 3/8" Square Drive Wobble Sockets METRIC Surface Drive

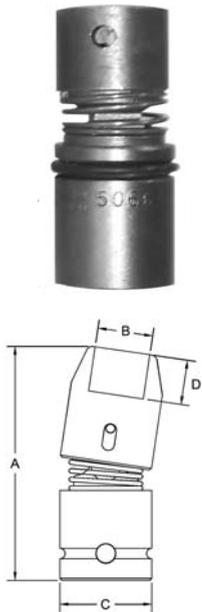

Part # Surface Drive	Hex Opening	Overall Length (A)	Diameter Nose (B)	Diameter Drive End (C)	Opening Depth (D)
4183-W	8	51.2	19	19	7
4740-W	8	61.2	19	19	9
4763-W	8	66	19	19	16.3
4728-W	8	73.6	19	19	11.4
4381-W	10	50	19	19	5.2
5041-W	10	51.2	19	19	4
4746-W	10	60.5	19	19	8.3
4710-W	10	65	19	19	8
4858-W	10	69.2	19	19	8
5087-W	10	103	15.8	19	7.8
5104-W	11	77	19	19	8.8
4381-13-W	13	50	19	19	5.2
4912-W	13	76	19	19	17
4894-W	15	63	28	19	8.5

**\*Standard sizes are available upon request\***

**Sockets can be configured with the following options:**

**FM = Fixed Magnet    SD = Side Magnet    TM = Tubular Magnet**

**SM = Spring Magnet    FL = Fast Lead**

**Fixed and rotating UHMW plastic sleeves can be special ordered**

## 3/8" Square Drive To 3/8" Male Drive Swivel Adapter



Part #	Male Drive	Female Drive	Angle
52695	3/8 Square Drive	3/8 Male	90 degree


**Swivel Adapter can be configured with the following options:**

**P = Pin Lock**

**B = Ball Lock**

# 1/2" Square Drive Wobbles Surface Drive

**METRIC**

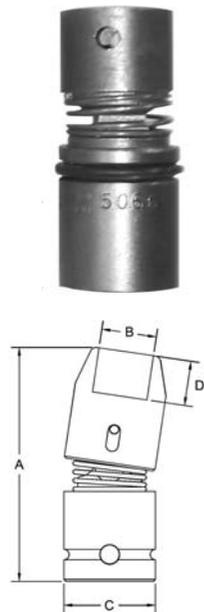

Part # Surface Drive	Hex Opening	Overall Length (A)	Diameter Nose (B)	Diameter Drive End (C)	Opening Depth (D)
4632-W	13	34.9	25	25	8
5128-W	13	64.7	25	25	9
4824-W	13	103	25	25	8
4603-W	15	63.5	31.6	25	10
5066-W	15	65	25	25	12
4642-W	18	63.5	31.7	25	10
4823-W	18	81	28.5	25	11
4642-L-W	18	83	28	25	10
4917-W	18	102	31.7	25	12
4604-W	21	63.3	31.7	25	10

**\*Standard sizes are available upon request\***

**Sockets can be configured with the following options:**

**FM = Fixed Magnet    SD = Side Magnet    TM = Tubular Magnet**  
**SM = Spring Magnet    FL = Fast Lead**

**Fixed and rotating UHMW plastic sleeves can be special ordered**

# 1/2" Square Drive To 1/2" Male Drive Swivel Socket



Part #	Male Drive	Female Drive	Angle
53965	1/2" Square Drive	1/2" Male Drive	90 degree

**Swivel Adapter can be configured with the following options:**

**P = Pin Lock**

**B = Ball Lock**