


1" Square Drive Sockets

6 Point and Double Hex, Extra Long Length

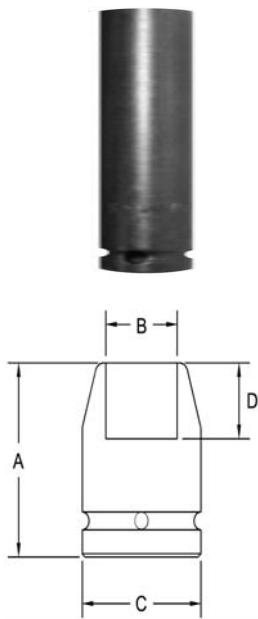

Part # 6 Point	Part # Double Hex	Hex Opening	Overall Length (A)	Diameter Nose (B)	Diameter Drive End (C)	Opening Depth (D)
6140	6140-D	3/4	4.25	1.25	2.12	.468
6141	6141-D	13/16	4.25	1.37	2.12	.531
6142	6142-D	7/8	4.25	1.43	2.12	.562
6143	6143-D	15/16	4.25	1.50	2.12	.625
6144	6144-D	1	4.25	1.56	2.12	.625
6145	6145-D	1 1/16	4.25	1.62	2.12	.687
6146	6146-D	1 1/8	4.25	1.75	2.12	.750
6147	6147-D	1 3/16	4.25	1.87	2.12	.750
6148	6148-D	1 1/4	4.25	2.12	2.12	.812
6149	6149-D	1 5/16	4.25	2.12	2.12	.812
6150	6150-	1 3/8	4.25	2.12	2.12	.812
6151	6151-D	1 7/16	4.25	2.25	2.12	.937
6152	6152-D	1 1/2	4.25	2.25	2.12	1.00
6153	6153-D	1 9/16	4.25	2.37	2.12	1.00
6154	6154-D	1 5/8	4.25	2.50	2.12	1.12
6155	6155-D	1 11/16	4.25	2.50	2.12	1.12
6156	6156-D	1 3/4	4.25	2.62	2.62	1.12
6157	6157-D	1 13/16	4.25	2.75	2.62	1.25
6158	6158-D	1 7/8	4.25	2.75	2.62	1.25
6159	6159-D	1 15/16	4.25	2.87	2.62	1.25
6160	6160-D	2	4.37	2.87	2.62	1.37
6161	6161-D	2 1/16	4.37	3.00	2.62	1.37
6162	6162-D	2 1/8	4.50	3.12	2.62	1.37
6163	6163-D	2 3/16	4.50	3.12	2.62	1.50
6164	6164-D	2 1/4	4.50	3.25	3.25	1.50
6165	6165-D	2 5/16	4.50	3.37	3.25	1.50
6166	6166-D	2 3/8	4.50	3.50	3.25	1.62
6167	6167-D	2 7/16	4.50	3.50	3.25	1.62
6168	6168-D	2 1/2	4.50	3.50	3.25	1.62
6169	6169-D	2 9/16	4.50	3.75	3.25	1.75
6170	6170-D	2 5/8	4.50	3.75	3.25	1.75
6171	6171-D	2 11/16	4.50	4.00	3.25	1.75
6172	6172-D	2 3/4	4.62	4.00	3.25	1.87
6173	6173-D	2 13/16	4.62	4.00	3.25	1.87

Sockets can be configured with the following options:
FM = Fixed Magnet SD = Side Magnet TM = Tubular Magnet
SM = Spring Magnet FL = Fast Lead
Fixed and rotating UHMW plastic sleeves can be special ordered