

1/2" Square Drive Universal Wrenches

6 Point and 12 Point Hex, Standard and Tension Type Extensions




Part # 6 Point	Part # Tension	Hex Opening	Overall Length (A)	Socket Length (B)	Socket Diameter (C)	Nose End Diameter (D)	Clearance Depth (E)
3414	3414-D	3/8	3.00	.812	.625	.531	.437
3415	3415-D	3/8	6.00	.812	.625	.531	.437
3416	3416-D	3/8	9.00	.812	.625	.531	.437
3417	3417-D	7/16	3.00	.875	.625	.625	.500
3418	3418-D	7/16	4.00	.875	.625	.625	.500
3419	3419-D	7/16	6.00	.875	.625	.625	.500
3420	3420-D	7/16	9.00	.875	.625	.625	.500
3421	3421-D	7/16	12.0	.875	.625	.625	.500
3422	3422-D	1/2	3.00	.875	.687	.687	.500
3423	3423-D	1/2	4.00	.875	.687	.687	.500
3424	3424-D	1/2	6.00	.875	.687	.687	.500
3425	3425-D	1/2	9.00	.875	.687	.687	.500
3426	3426-D	1/2	3.00	1.00	.750	.750	.562
3427	3427-D	1/2	4.00	1.00	.750	.750	.562
3428	3428-D	1/2	6.00	1.00	.750	.750	.562
3429	3429-D	1/2	9.00	1.00	.750	.750	.562
3430	3430-D	1/2	12.0	1.00	.750	.750	.562
3431	3431-D	1/2	3.00	1.00	.875	.687	.468
3432	3432-D	1/2	6.00	1.00	.875	.687	.468
3433	3433-D	1/2	9.00	1.00	.875	.687	.468
3434	3434-D	1/2	12.0	1.00	.875	.687	.468
3435	3435-D	9/16	3.00	1.00	.812	.812	.562
3436	3436-D	9/16	4.00	1.00	.812	.812	.562
3437	3437-D	9/16	6.00	1.00	.812	.812	.562
3438	3438-D	9/16	9.00	1.00	.812	.812	.562
3439	3439-D	9/16	12.0	1.00	.812	.812	.562
3440	3440-D	9/16	3.00	1.06	.875	.750	.531
3441	3441-D	9/16	4.00	1.06	.875	.750	.531
3442	3442-D	9/16	6.00	1.06	.875	.750	.531
3443	3443-D	9/16	9.00	1.06	.875	.750	.531
3444	3444-D	9/16	12.0	1.06	.875	.750	.531
3445	3445-D	9/16	3.00	1.12	1.00	.750	.562
3446	3446-D	9/16	4.00	1.12	1.00	.750	.562
3447	3447-D	9/16	6.00	1.12	1.00	.750	.562
3448	3448-D	9/16	9.00	1.12	1.00	.750	.562
3449	3449-D	5/8	3.00	1.12	.875	.875	.593
3450	3450-D	5/8	4.00	1.12	.875	.875	.593
3451	3451-D	5/8	6.00	1.12	.875	.875	.593
3452	3452-D	5/8	9.00	1.12	.875	.875	.593
3453	3453-D	5/8	12.0	1.12	.875	.875	.593

CONTINUED



1/2" Square Drive Universal Wrenches

6 Point and 12 Point Hex, Standard and Tension Type Extensions

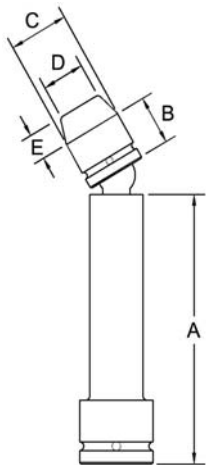

Part # 6 Point	Part # 12 Point	Hex Opening	Overall Length (A)	Socket Length (B)	Socket Diameter (C)	Nose End Diameter (D)	Clearance Depth (E)
3454	3454-D	5/8	3.00	1.18	1.00	.843	.625
3455	3455-D	5/8	6.00	1.18	1.00	.843	.625
3456	3456-D	5/8	9.00	1.18	1.00	.843	.625
3457	3457-D	5/8	12.0	1.18	1.00	.843	.625
3458	3458-D	11/16	3.00	1.25	1.00	1.00	.687
3459	3459-D	11/16	4.00	1.25	1.00	1.00	.687
3460	3460-D	11/16	6.00	1.25	1.00	1.00	.687
3461	3461-D	11/16	9.00	1.25	1.00	1.00	.687
3462	3462-D	11/16	12.0	1.25	1.00	1.00	.687
3463	3463-D	3/4	3.00	1.25	1.12	1.12	.687
3464	3464-D	3/4	4.00	1.25	1.12	1.12	.687
3465	3465-D	3/4	6.00	1.25	1.12	1.12	.687
3466	3466-D	3/4	9.00	1.25	1.12	1.12	.687
3467	3467-D	3/4	12.0	1.25	1.12	1.12	.687
3468	3468-D	3/4	3.00	1.37	1.25	1.03	.640
3469	3469-D	3/4	4.00	1.37	1.25	1.03	.640
3470	3470-D	3/4	6.00	1.37	1.25	1.03	.640
3471	3471-D	3/4	9.00	1.37	1.25	1.03	.640
3472	3472-D	3/4	12.0	1.37	1.25	1.03	.640
3473	3473-D	15/16	3.00	1.37	1.31	1.31	.640
3474	3474-D	15/16	4.00	1.37	1.31	1.31	.640
3475	3475-D	15/16	6.00	1.37	1.31	1.31	.640
3476	3476-D	15/16	9.00	1.37	1.31	1.31	.640
3477	3477-D	15/16	12.0	1.37	1.31	1.31	.640

Sockets can be configured with the following options:

S = Standard (Floppy)

T = Tension

FM = Fixed Magnetic