


3/8" Square Drive Sockets

6 Point and Double Hex, Long and Extra Long Length

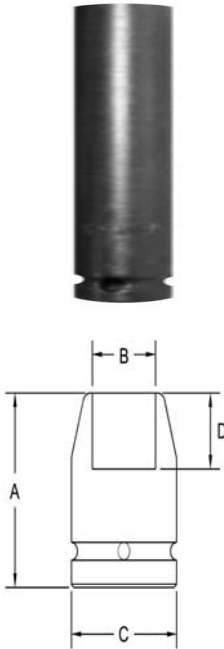

Part # 6 Point	Part # Double Hex	Hex Opening	Overall Length (A)	Diameter Nose (B)	Diameter Drive End (C)	Opening Depth (D)
2069	2069-D	1/4	2.00	.437	.750	.156
2070	2070-D	1/4	3.50	.437	.750	.156
2071	2071-D	9/32	2.00	.437	.750	.187
2072	2072-D	5/16	2.00	.500	.750	.187
2073	2073-D	5/16	3.50	.500	.750	.187
2074	2074-D	11/32	2.00	.500	.750	.187
2075	2075-D	11/32	3.50	.500	.750	.187
2076	2076-D	3/8	2.00	.593	.750	.250
2077	2077-D	3/8	3.50	.593	.750	.250
2078	2078-D	7/16	2.00	.687	.750	.281
2079	2079-D	7/16	3.50	.687	.750	.281
2080	2080-D	1/2	2.00	.812	.812	.343
2081	2081-D	1/2	3.50	.812	.812	.343
2082	2082-D	9/16	2.00	.875	.875	.437
2083	2083-D	9/16	3.50	.875	.875	.437
2084	2084-D	5/8	2.00	.937	.937	.437
2085	2085-D	5/8	3.50	.937	.937	.437
2086	2086-D	11/16	2.00	1.00	1.00	.437
2087	2087-D	11/16	3.50	1.00	1.00	.437
2088	2088-D	1/2	2.00	1.06	1.06	.468
2089	2089-D	3/4	3.50	1.06	1.06	.468
2090	2090-D	13/16	2.00	1.25	1.25	.531
2091	2091-D	13/16	3.50	1.25	1.25	.531
2092	2092-D	7/8	2.00	1.25	1.25	.562
2093	2093-D	7/8	3.50	1.25	1.25	.562

Sockets can be configured with the following options:
FM = Fixed Magnet SD = Side Magnet TM = Tubular Magnet
SM = Spring Magnet FL = Fast Lead
Fixed and rotating UHMW plastic sleeves can be special ordered